UNDER SHELF LUMINAIRE **TSL SERIES**

Page 1 of 2 12-1/4", 21-1/4", 24-1/2", 33-1/2", 42-1/2" LENGTHS, ONE OR TWO LAMPS, T5 PREHEAT

Features

- 1-1/8" shallow depth.
- Five nominal lengths.
- Optional grounded convenience outlet.
- Baked white polyester enamel. ٠
- On/off switch supplied standard with supply pack.




MOUNTING METHODS



Attractive, unobtrusive lighting

DIMENSIONS All K.O.'s are 7/8" unless otherwise noted.



Job Information Type: Job Name: Cat. No.: Lamp(s): Volts/Ballast: Lightolier a Genlyte Thomas Company www.lightolier.com Technical Information: (978) 657-7600 • Fax (978) 658-0595

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2002 Genlyte Thomas Group LLC (Lightolier Division) A0902

SECTION 3A/Folio H150-09




UNDER SHELF LUMINAIRE **TSL SERIES**

Page 2 of 2 12-1/4", 21-1/4", 24-1/2", 33-1/2", 42-1/2" LENGTHS, ONE OR TWO LAMPS, T5 PREHEAT

ORDERING INFORMATION

Explanation of Catalog Number. Example: TSL0018W BPR

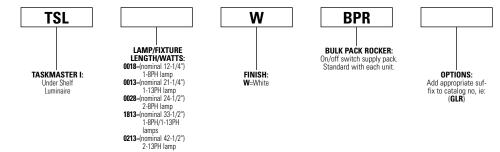

For electronic ballast, substitute **TSLP** for **TSL**, ie: **TSLP**0018W BPR.

OPTIONS & ACCESSORIES

INLINE FUSING: SUFFIX: GLR. Grounded Convenience Outlet: Suffix: CO.

SPECIFICATIONS

MATERIALS: Chassis parts are die-formed cold rolled steel. LENS: Ribbed, white opal acrylic. FINISH: Cavity—white baked enamel, minimum 85% reflectance. Phosphate undercoating. Chassis exterior—white baked enamel. ELECTRICAL: Thermally protected class "P" ballast C.B.M. approved, non PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90°. LABELS: I.B.E.W. Listed by Underwriters Laboratories.

Job Information

Type:

Lightolier a Genlyte Thomas Company www.lightolier.com Technical Information: (978) 657-7600 • Fax (978) 658-0595 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2002 Genlyte Thomas Group LLC (Lightolier Division) A0902 SECTION 3A/Folio H150-09